32 Channel NVR with 4 SATA Port





- Compression: H.265
- Decoding: 4K
- Channel: 32 Channels
- Storage: 4 SATA Port (10TB each)
- Throughput: 512Mbps

Matrix NVRs are packed with high end processors to deliver all the functionalities like high resolution recording, playback, simultaneous local and remote monitoring along with storing for higher number of days. Furthermore, these latest NVRs are also backed with an intelligent software to detect threats and send instant notifications for real-time security.

All in all, these comprehensive, flexible, reliable, integrated NVRs provide a proficient, persistent and a preventive security solution suitable for enterprises and multi-location offices.

USP



Customer Care: +91 265 2630555

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Made in India

### 32 Channel NVR with 4 SATA Port

ATRIX
SOLUTIONS

VIDEO     Input   32 IP Chanels     Output   HDMI (2.0) - 1 Port     Compression   H.265/H.264/ Motion JPEG     AUDIO   Input     1 Channel, RCA Port (X0no, Unbalanced output, 2.0Vp-p, Range (-2dBu to 22dBu)     Output   1 Channel, RCA Port (Mono, Unbalanced output, 2.0Vp-p, Range (-2dBu to 22dBu)     Compression   G.711, G.726, PCM     THROUGHPUT     Downlink Throughput   256Mbps Following Scenarios are Considered:     1. Cameras Streaming to Device   2. Cameras of Cascaded Devices are Being Viewed on Local     3. Streaming from NAS for Local/Web Client   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Web Client     2. Storage or Backup to NAS   5     Simultaneous Log-in   9+1(Admin)     Display     Digital Zoom on Live   Yes     Snapshot   Yes     Multiple Camera Viewing   Through Cascading (up to 20 Devices)     OSD   Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Namber and Name, Status, Vidos Loss, Recording and Disabled Channel Namber and	TECHNICAL SPECIFICATION					
Output   HDMI (2.0) - 1 Port     Compression   H.265/H.264/ Motion JPEG     AUDIO     Input   1 Channel, RCA Port (2.0Vp-p), Range (-2dBu to 22dBu)     Output   1 Channel, RCA Port (Mono, Unbalanced output, 2.0Vp-p, Range (-2dBu to 22dBu)     Compression   G.11, G.726, PCM     THROUGHPUT     Downlink Throughput   256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Device 2. Cameras of Cascaded Devices are Being Viewed on Local 3. Streaming from NAS for Local/Web Client     Uplink Throughput   256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Web Client     Uplink Throughput   256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Web Client     Simultaneous Log-in   9+1(Admin)     DISPLAY     Split (Through LAN/HDMI)   1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and Sequential     Resolution(HDMI)   1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and Sequential     Resolution(HDMII)   1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and Sequential     Resolution(HDMII)   1x1, 2x2, 4x1080p, 54x20p, 64 x D1     Digital Zoom on Live   Yes     Snapshot   Yes						
Compression   H.265/H.264/ Motion JPEG     AUDIO     Input   1 Channel, RCA Port(2.0Vp-p), Range (-2dBu to 22dBu)     Output   1 Channel, RCA Port (Mono, Unbalanced output, 2.0Vp-p, Range (-2dBu to 22dBu)     Compression   G.711, G.726, PCM     Downlink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Device     2. Cameras of Cascaded Devices are Being Viewed on Local   3. Streaming from NAS for Local/Web Client     Uplink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Web Client     Uplink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Web Client     Uplink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Web Client     2. Storage or Backup to NAS   Simultaneous Log-in     Simultaneous Log-in   1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9, 2+12, 5x5, 6x6, 8x8 and Sequential     Resolution(HDMI)   1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9, 2+12, 5x5, 6x6, 8x8 and Sequential     Resolution NLive   Yes     Snapshot   Yes     Snapshot	Input	32 IP Channels				
AUDIO     Input   1 Channel, RCA Port(2.0Vp-p), Range (-2dBu to 22dBu)     Output   1 Channel, RCA Port (Mono, Unbalanced output, 2.0Vp-p, Range (-2dBu to 22dBu)     Compression   G.711, G.726, PCM     THROUGHPUT     Downlink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Device     2. Cameras of Cascaded Devices are Being Viewed on Local   3. Streaming from NAS for Local/Web Client     Uplink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Web Client     2. Storage or Backup to NAS   5     Simultaneous Log-in   9+1(Admin)     DISPLAY     Split (Through LAN/HDMI)   1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and Sequential     Resolution(HDMI)   4 x 4k/ 16 x 1080P / 64 x D1     Local Decoding   5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1     Digital Zoom on Live   Yes     Snapshot   Yes     Snapshot   Yes     Sultify Command   12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIF     Pre-Record   Up to 30 Sec     Snapshot Format	Output	HDMI (2.0) – 1 Port				
AUDIO     Input   1 Channel, RCA Port(2.0Vp-p), Range (-2dBu to 22dBu)     Output   1 Channel, RCA Port (Mono, Unbalanced output, 2.0Vp-p, Range (-2dBu to 22dBu)     Compression   G.711, G.726, PCM     THROUGHPUT     Downlink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Device     2. Cameras of Cascaded Devices are Being Viewed on Local   3. Streaming from NAS for Local/Web Client     Uplink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Web Client     2. Storage or Backup to NAS   5     Simultaneous Log-in   9+1(Admin)     DISPLAY     Split (Through LAN/HDMI)   1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and Sequential     Resolution(HDMI)   4 x 4k/ 16 x 1080P / 64 x D1     Local Decoding   5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1     Digital Zoom on Live   Yes     Snapshot   Yes     Snapshot   Yes     Sultify Command   12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIF     Pre-Record   Up to 30 Sec     Snapshot Format	Compression	H.265/H.264/ Motion JPEG				
Output 1 Channel, RCA Port (Mono, Unbalanced output, 2.0Vp-p, Range (-2dBu to 22dBu)   Compression G.711, G.726, PCM   THROUGHPUT   Downlink Throughput 256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Device 2. Cameras of Cascaded Devices are Being Viewed on Local 3. Streaming from NAS for Local/Web Client   Uplink Throughput 256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Web Client   Uplink Throughput 256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Web Client   2. Storage or Backup to NAS   Simultaneous Log-in 9+1(Admin)   DISPLAY   Split (Through LAN/HDMI) 1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9, 2+12, 5x5, 6x6, 8x8 and Sequential   Resolution(HDMI) 4 x 4k/ 16 x 1080P / 64 x D1   Local Decoding 5 x 4k, 15x 3MP, 24x 1080p, 54x720p, 64 x D1   Digital Zoom on Live Yes   Snapshot Yes   Multiple Camera Viewing Through Cascading (up to 20 Devices)   OSD Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status,	•	· · ·				
Output 1 Channel, RCA Port (Mono, Unbalanced output, 2.0Vp-p, Range (-2dBu to 22dBu)   Compression G.711, G.726, PCM   THROUGHPUT   Downlink Throughput 256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Device 2. Cameras of Cascaded Devices are Being Viewed on Local 3. Streaming from NAS for Local/Web Client   Uplink Throughput 256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Web Client   Uplink Throughput 256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Web Client   2. Storage or Backup to NAS   Simultaneous Log-in 9+1(Admin)   DISPLAY   Split (Through LAN/HDMI) 1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9, 2+12, 5x5, 6x6, 8x8 and Sequential   Resolution(HDMI) 4 x 4k/ 16 x 1080P / 64 x D1   Local Decoding 5 x 4k, 15x 3MP, 24x 1080p, 54x720p, 64 x D1   Digital Zoom on Live Yes   Snapshot Yes   Multiple Camera Viewing Through Cascading (up to 20 Devices)   OSD Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status,						
Range (-2dBu to 22dBu)   Compression G.711, G.726, PCM   THROUGHPUT   Downlink Throughput 256Mbps   Following Scenarios are Considered: 1. Cameras Streaming to Device   2. Cameras of Cascaded Devices are Being Viewed on Local 3. Streaming from NAS for Local/Web Client   Uplink Throughput 256Mbps   Following Scenarios are Considered: 1. Cameras Streaming to Web Client   2. Storage or Backup to NAS 5. Streaming to Web Client   2. Storage or Backup to NAS 9+1(Admin)   DISPLAY   Split (Through LAN/HDMI) 1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and Sequential   Resolution(HDMI) 4 x 4k/ 16 x 1080P / 64 x D1   Local Decoding 5 x 4k, 15x 3MP, 24x 1080p, 54x720p, 64 x D1   Digital Zoom on Live Yes   Multiple Camera Viewing Through Cascading (up to 20 Devices)   Multiple Camera Viewing Through Cascading (up to 20 Devices)   OSD Channel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)   RECORDING   Image Resolution 12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIF   Pre-Record Up to 30 Sec	•					
Compression   G.711, G.726, PCM     THROUGHPUT     Downlink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Device     2. Cameras of Cascaded Devices are Being Viewed on Local   3. Streaming from NAS for Local/Web Client     Uplink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Web Client     2. Storage or Backup to NAS   5000000000000000000000000000000000000						
THROUGHPUT     Downlink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Device     2. Cameras of Cascaded Devices are Being Viewed on Local   3. Streaming from NAS for Local/Web Client     Uplink Throughput   256Mbps     Following Scenarios are Considered:   1. Cameras Streaming to Web Client     2. Storage or Backup to NAS   5000 (Storage or Backup to NAS     Simultaneous Log-in   9+1(Admin)     DISPLAY     Split (Through LAN/HDMI)   1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and Sequential     Resolution(HDMI)   4 x 4k/ 16 x 1080P / 64 x D1     Local Decoding   5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1     Digital Zoom on Live   Yes     Snapshot   Yes     Multiple Camera Viewing   Through Cascading (up to 20 Devices)     OSD   Channel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)     RECORDING     Image Resolution   12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIF     Pre-Record   Up to 30 Sec     Snapshot Format   JPEG     Recording Types   S	Compression					
Following Scenarios are Considered:1. Cameras Streaming to Device2. Cameras of Cascaded Devices are Being Viewed on Local3. Streaming from NAS for Local/Web ClientUplink Throughput256MbpsFollowing Scenarios are Considered:1. Cameras Streaming to Web Client2. Storage or Backup to NASSimultaneous Log-in9+1(Admin)DISPLAYSplit (Through LAN/HDMI)1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and SequentialResolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1Local Decoding5x 4k, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)Image Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI						
Following Scenarios are Considered:1. Cameras Streaming to Device2. Cameras of Cascaded Devices are Being Viewed on Local3. Streaming from NAS for Local/Web ClientUplink Throughput256MbpsFollowing Scenarios are Considered:1. Cameras Streaming to Web Client2. Storage or Backup to NASSimultaneous Log-in9+1(Admin)DISPLAYSplit (Through LAN/HDMI)1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and SequentialResolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1Local Decoding5x 4k, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)Image Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Downlink Throughput	256Mbps				
1. Cameras Streaming to Device2. Cameras of Cascaded Devices are Being Viewed on Local3. Streaming from NAS for Local/Web ClientUplink Throughput256MbpsFollowing Scenarios are Considered:1. Cameras Streaming to Web Client2. Storage or Backup to NASSimultaneous Log-in9+1(Admin)DISPLAYSplit (Through LAN/HDMI)1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and SequentialResolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1Local Decoding5x 4k, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)mage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOrtimizationAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	51	•				
2. Cameras of Cascaded Devices are Being Viewed on Local 3. Streaming from NAS for Local/Web ClientUplink Throughput256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Web Client 2. Storage or Backup to NASSimultaneous Log-in9+1(Admin)DISPLAYSplit (Through LAN/HDMI)1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and SequentialResolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1 Local Decoding5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1 Digital Zoom on LiveYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Os per camera support)Image Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorage Adaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Lo		-				
3. Streaming from NAS for Local/Web Client   Uplink Throughput 256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Web Client   2. Storage or Backup to NAS   Simultaneous Log-in 9+1(Admin)   DISPLAY   Split (Through LAN/HDINI) 1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and Sequential   Resolution(HDMI) 4 x 4k/ 16 x 1080P / 64 x D1   Local Decoding 5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1   Digital Zoom on Live Yes   Snapshot Yes   Multiple Camera Viewing Through Cascading (up to 20 Devices)   OSD Channel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)   RECORDING   Image Resolution 12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIF   Pre-Record Up to 30 Sec   Post-Record Up to 30 Sec   Post-Record 10-300 Sec   Snapshot Format JPEG   Recording Types Scheduled, Manual, Alarm and COSEC   OPTIMIZATION   Storage   Adaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.		-				
Uplink Throughput256Mbps Following Scenarios are Considered: 1. Cameras Streaming to Web Client 2. Storage or Backup to NASSimultaneous Log-in9+1(Admin)DISPLAYSplit (Through LAN/HDMI)1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and SequentialResolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1Local Decoding5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI		-				
Following Scenarios are Considered: 1. Cameras Streaming to Web Client 2. Storage or Backup to NASSimultaneous Log-in9+1(Admin)DISPLAYSplit (Through LAN/HDMI)1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and SequentialResolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1Local Decoding5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-RecordJPEGSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Uplink Throughput					
1. Cameras Streaming to Web Client 2. Storage or Backup to NASSimultaneous Log-in9+1(Admin)DISPLAYSplit (Through LAN/HDMI)1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and SequentialResolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1Local Decoding5x 4k, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)Through Execord12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI		•				
2. Storage or Backup to NASSimultaneous Log-in9+1(Admin)DISPLAYSplit (Through LAN/HDMI)1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and SequentialResolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1Local Decoding5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI		-				
Simultaneous Log-in9+1(Admin)DISPLAYSplit (Through LAN/HDMI)1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and SequentialResolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1Local Decoding5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI						
DISPLAY     Split (Through LAN/HDMI)   1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and Sequential     Resolution(HDMI)   4 x 4k/ 16 x 1080P / 64 x D1     Local Decoding   5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1     Digital Zoom on Live   Yes     Snapshot   Yes     Multiple Camera Viewing   Through Cascading (up to 20 Devices)     OSD   Channel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)     RECORDING     Image Resolution   12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIF     Pre-Record   Up to 30 Sec     Post-Record   10-300 Sec     Snapshot Format   JPEG     Recording Types   Scheduled, Manual, Alarm and COSEC     OPTIMIZATION   Storage     Adaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.     Bandwidth   Automatically Adapts Optimized Resolution on Local Display Through HDMI	Simultaneous Log-in					
8x8 and SequentialResolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1Local Decoding5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI		DISPLAY				
Resolution(HDMI)4 x 4k/ 16 x 1080P / 64 x D1Local Decoding5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Split (Through LAN/HDMI)	1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1©+12, 1+9, 4+9,2+12, 5x5, 6x6,				
Local Decoding5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI		8x8 and Sequential				
Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Resolution(HDMI)	4 x 4k/ 16 x 1080P / 64 x D1				
Digital Zoom on LiveYesSnapshotYesMultiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Local Decoding	5x 4K, 15x 3MP, 24x 1080p, 54x720p, 64 x D1				
Multiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Digital Zoom on Live					
Multiple Camera ViewingThrough Cascading (up to 20 Devices)OSDChannel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI		Yes				
Channel (As per camera support)RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Multiple Camera Viewing	Through Cascading (up to 20 Devices)				
RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	OSD	Channel Number and Name, Status, Video Loss, Recording and Disabled				
RECORDINGImage Resolution12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIFPre-RecordUp to 30 SecPost-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI		Channel (As per camera support)				
Pre-Record Up to 30 Sec   Post-Record 10-300 Sec   Snapshot Format JPEG   Recording Types Scheduled, Manual, Alarm and COSEC   OPTIMIZATION   Storage Adaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.   Bandwidth Automatically Adapts Optimized Resolution on Local Display Through HDMI						
Post-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Image Resolution	12MP, 8MP, 5MP, 3MP, 2MP, 1080P, D1, CIF				
Post-Record10-300 SecSnapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Pre-Record	Up to 30 Sec				
Snapshot FormatJPEGRecording TypesScheduled, Manual, Alarm and COSECOPTIMIZATIONStorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Post-Record	· · ·				
Recording Types Scheduled, Manual, Alarm and COSEC   OPTIMIZATION   Storage Adaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.   Bandwidth Automatically Adapts Optimized Resolution on Local Display Through HDMI						
OPTIMIZATION     Storage   Adaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.     Bandwidth   Automatically Adapts Optimized Resolution on Local Display Through HDMI	•					
StorageAdaptive recording: Automatically Reduces the Number of Frames Captured per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	5 /1					
per Second Where There is No Motion, Thereby Saving Storage Space.BandwidthAutomatically Adapts Optimized Resolution on Local Display Through HDMI	Storage					
Bandwidth Automatically Adapts Optimized Resolution on Local Display Through HDMI						
	Bandwidth					
		PLAYBACK AND BACKUP				

Customer Care: +91 265 2630555

E-mail: Inquiry@MatrixComSec.com

32 Channel NVR with 4 SATA Port



Search Mode	Date and Time, Camera, Event, Recording Type		
Playback Modes	Fast Forward, Slow Forward, Slow Reverse, Fast Reverse at Different Speed		
	Control, Next-Previous Frame		
Backup	Manual Backup over USB and NAS, Scheduled Backup over USB, NAS and FTP		
Configuration Backup	Yes		
Network Functions	TCP/IP, DHCP, PPPOE DNS, DDNS, Free Matrix DNS, FTP, SMTP, NTP,		
	RTP/RTSP, HTTP, CIFS/NFS, UPnP		
Remote Operation	Monitor, PTZ Control, Playback, System Setting, File Download, Log		
	Information, Upgrade		
	EVENTS AND ACTION		
Trigger Events	Motion Detection, View Tampering, Connection Failure, Recording Failure,		
	Manual Trigger, On Boot Alarm, Storage, Alert, Disk Volume Full, Disk Fault,		
	Scheduled Backup Fail		
Actions	Recording on Selected Channel, FTP/Email server, Email Notification with		
	Snapshot, TCP Notification, Recall PTZ Preset Position, Turn On/Off Alarm		
	Outputs, Buzzer Notification, SMS Notification, Calling from Mobile App		
	STORAGE		
SATA Interface	4 SATA III (10TB per port)		
NAS	2 NAS		
USB	1 TB USB Drive		
RAID	RAID-0, RAID-1, RAID-5, RAID-10, Single Disk		
Retention	Camera wise, HDD usage % wise, Day wise		
	INTERFACES		
Network Interface	2 Ports x Ethernet (RJ-45) 10/100/1000Mbps		
USB	3 Ports (1x USB 3.0, 2x USB2.0)		
LED	System Status LED, Power LED		
Alarm Input	2		
Alarm Output	1		
Reset Switch	Yes		
Buzzer	Yes		
	SYSTEM INTERFACE		
Processor	Hisilicon Hi3536A		
OS	Linux		
Control Mode	Mouse, Web Client and Mobile Client		
	CAMERA SUPPORT		
Camera Brands	Axis, ACTi, Samsung, Panasonic, Sony, Hikvision, Dahua, Planet, Vivotek, LevelOne,		
	Grandstream, Infinova, D-Link, Mobotix, and ONVIF 2.0 & above Support		
ONVIF	Yes		
	ENVIRONMENT CONDITIONS		
Operating Temperature	0°C to +50°C (32°F to 122°F)		
Humidity Range	5% to 95% RH Non-Condensing		
	ELECTRICAL AND MECHANICAL		

Customer Care: +91 265 2630555

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

SECURITY SOLUTIONS


32 Channel	NVR	with 4	SATA	Port
------------	-----	--------	------	------

Power Input	SMPS (100-240-volt AC)
Dimension(W×H×D)	442 (without clamp) × 105.75 × 240.45
Weight(Kg)	3.88kg

### SATATYA NVR3204X 32 Channel NVR with 4 SATA Port

SECURITY SOLUTIONS

DIMENSIONS

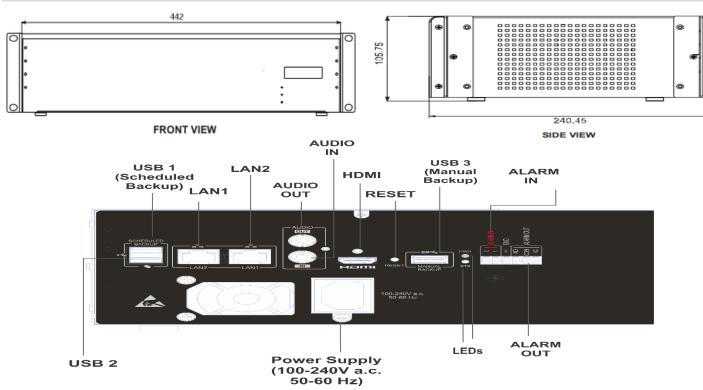

#### ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



#### MATRIX COMSEC

Head Office 394-GIDC, Makarpura, Vadodara-390 010, India. Ph: +91 265 2630555 E-mail: Inquiry@MatrixComSec.com

Factory 19-GIDC, Waghodia, Dist. Vadodara-391 760, India. Ph: +91 2668 263172/73

www.MatrixVideoSurveillance.com

E-mail: Inquiry@MatrixComSec.com